



TEXPEN[®] Marker

Industrial Steel Ball Tip Paint Marker

HANDLING

- Do not handle, store or open near an open flame, sources of heat or sources of ignition. Protect material from direct sunlight. When using do not smoke. Explosion-proof general and local exhaust ventilation. Take precautionary measures against static discharges. All equipment used when handling the product must be grounded. Use non-sparking tools and explosion-proof equipment. Do not get this material in contact with eyes. Avoid inhalation of vapors and spray mists. Avoid prolonged exposure. Use only outdoors or in a well-ventilated area. Wear appropriate personal protective equipment. Observe good industrial hygiene practices.

STORAGE

- Store locked up. Keep away from heat, sparks and open flame. Prevent electrostatic charge build-up by using common bonding and grounding techniques. Store in a cool, dry place out of direct sunlight. Store in original tightly closed container. Store in a well-ventilated place. Keep in an area equipped with sprinklers. Store away from incompatible materials (see Section 10 of the SDS).

DISPOSAL


- Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Dispose of contents/container in accordance with local/regional/national/international regulations.

FEATURES

- Write sharp, defined, bright marks on any surface including metal, plastic, glass, concrete, rubber and more
- Ergonomically correct marker that enables you to mark at all angles, even upside down
- Marker retains its shape unlike tube-style markers
- Paint flow is controlled by the pressure bulb at the end of the barrel
- Drying Time: 25 - 35 minutes

MATERIALS COMPATIBILITY

- Safe on most surfaces
- Surface test should be run to determine compatibility prior to use

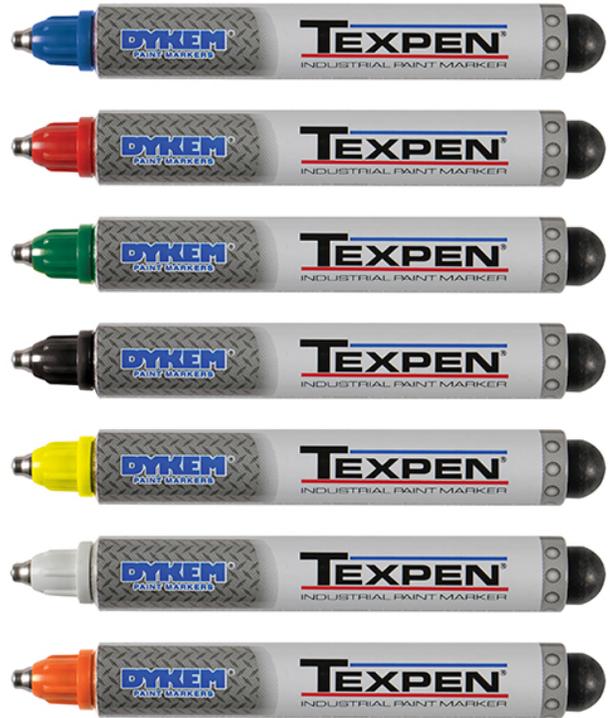

PHYSICAL PROPERTIES

Physical State	Liquid.
Odor	aromatic
Flash Point	108.0 °F (42.2 °C) Tag Closed Cup
Boiling Point	318 - 338 °F (158.89 - 170 °C)
VOC Content	30.78%, 399 g/L,
Evaporation Rate	< 1 (BuAc = 1)
Vapor Density	> 1 (air = 1)
Prop 65 Warning	YES

AVAILABLE IN

Units/Case	Marker Tip	Color	Part #
12	Steel Medium Tip	Blue	16013
12	Steel Medium Tip	Red	16023
12	Steel Medium Tip	Black	16033
12	Steel Medium Tip	Green	16043
12	Steel Fine Tip	Yellow	16060
12	Steel Medium Tip	Yellow	16063
12	Steel Fine Tip	White	16080
12	Steel Medium Tip	White	16083
12	Steel Medium Tip	Orange	16103



CONTACT YOUR ITW PRO BRANDS REPRESENTATIVE TODAY!

800.241.8334 | www.itwprobrands.com

LPS[®], SCRUBS[®], DYKEM[®], Accu-Lube[®], DYMON[®], Spray Nine[®], and Cedar[®] are registered trademarks and Rustlick[™], Diamondkote[™], and MetalMates[™] are trademarks of Illinois Tool Works • All Rights Reserved